



SPECON PIV VARI-CHAIN TRANSMISSION SPECIFICATION SHEET

Customer		Name:	
Address		Date:	
Distributor		Branch	
Sales Rep		Contact Phone No.:	
Manufacturer	<input type="checkbox"/> Specon <input type="checkbox"/> Other _____	Email:	
Model No.:		Serial No.:	
Ratio:			

STYLE I — Horizontal


Standard units are supplied with the control screw at either Position "TL" or "TR" – that is, at the oil level sight gage end of the transmission. Specify desired position. As an option, the transmission can be supplied with the control screw at Positions "BL" or "BR". Not available on size 0.

Specify desired shaft positions by designating LL, LR, UL or UR as indicated. Input and output shafts cannot be in line. Input and output shafts can be on the same side or opposite sides of the transmission. Input and/or output shafts can be double extended.

Fairchild Industrial Products Company
 3920 West Point Boulevard • Winston-Salem, NC 27103
 phone: 336-659-3400 • fax: 336-659-9323 • 800-334-8422
 sales@fairchildproducts.com • www.fairchildproducts.com

Your PIV Chain Drive Transmission may have two, three or four shafts projecting from the housing, depending on its configuration.

1. Please indicate shaft locations and sizes by checking the appropriate boxes and filling in the blanks for shaft diameter and length corresponding to each shaft location on your Transmission.
2. Indicate the centerline distance between two shafts, if applicable.
3. If your unit is equipped with a Handwheel, please check the appropriate box to indicate the position of the Handwheel.

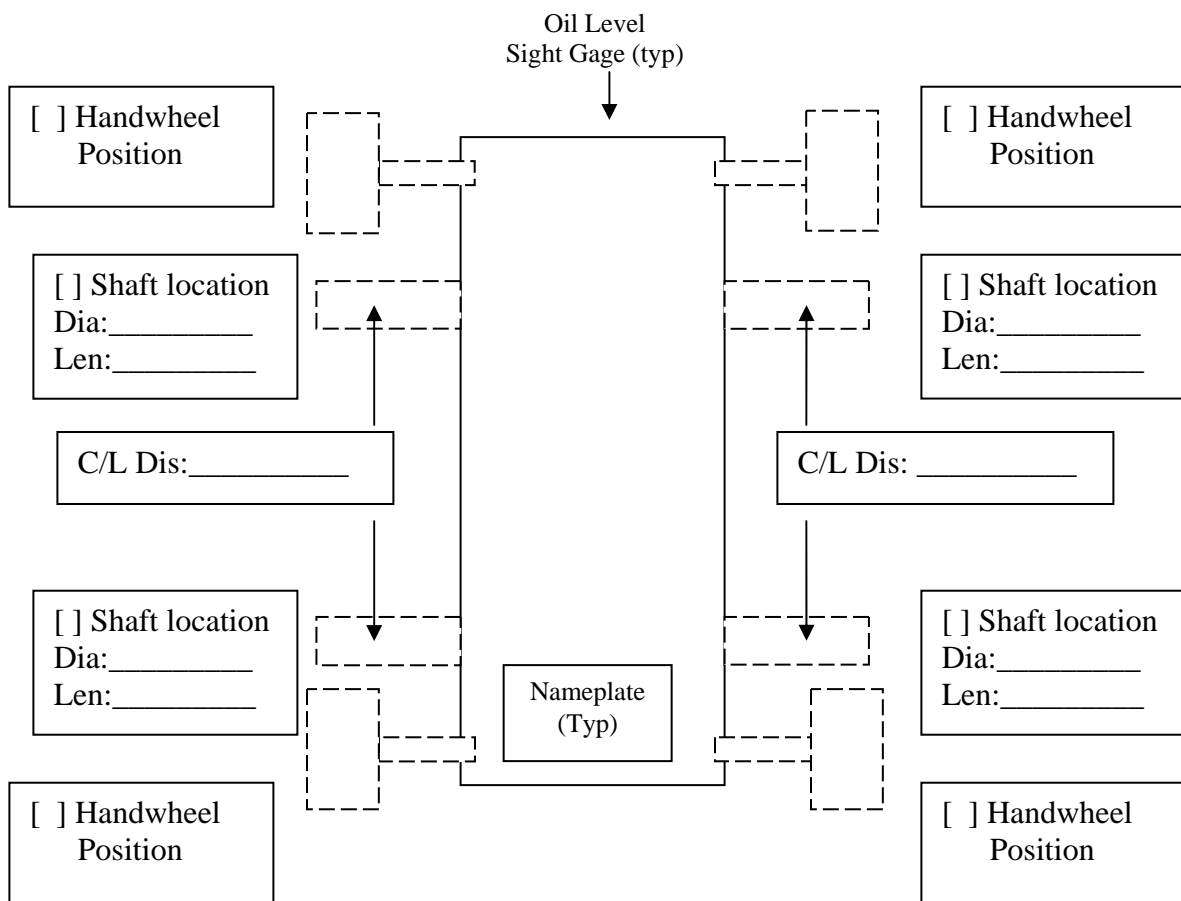

Customer: _____

Distributor Branch _____

Contact Phone No.: _____